


ZEN.041




ZEN.021



ZEN.034



ZEN.434



ZEN.451




ZEN.124



ZEN.109



ZEN.110



ZEN.131



ZEN.141



ZEN.091



ZEN.164




ZEN.311



ZEN.301



ZEN.280



ZEN.271



ZEN.261



ZEN.511



ZEN.544



ZEN.321



ZEN.423




ZEN.054



ZEN.061



ZEN.624



ZEN.674



ZEN.734



ZEN.711



ZEN.774



ZEN.790



ZEN.800



ZEN.810



ZEN.820



ZEN.830




ZEN.840



ZEN.850



ZEN.204




ZEN.861



ZEN.871



ZEN.881

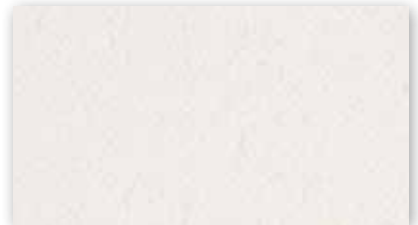

ZEN.891


ZEN

lano carpets for contract

Fabricagemethode Technique de fabrication Manufacturing process Herstellungsart Tecnica di fabbricazione	tufted, 1/10" saxony	Pool Samenstellung Nature du velours Pile composition Polmaterial Composizione felpa	PA	Tuftdoek Premier dossier Primary backing Trägermaterial Tela di supporto	non woven	Rugtype Envers Secondary backing Rücken Sottofondo	SB
Totale dikte Hauteur totale Total height Gesamthöhe Spessore totale	± 8,5 mm	Nuttige poolhoogte Hauteur de velours utile Effective pile height Tatsächliche Florhöhe Spessore felpa utile	± 6,0 mm	Breedte Largeur Width Breite Altezza	± 400 cm	Aantal noppen/m ² Nombre de points/m ² Number of knots/sqm Noppenzahl/m ² Numero di punti/mq	± 200940
Poolinzetgewicht/m ² Poids mis en oeuvre/m ² Pile weight/sqm Poleinsatzgewicht/m ² Peso felpa/mq	± 1000 gr	Totaal gewicht/m ² Poids total/m ² Total weight/sqm Gesamtwicht/m ² Peso totale/mq	± 2160 gr	EN 13501-1 Brandgedrag Comportement au feu Fire behaviour Brennverhalten Reazione al fuoco	B_{fl}-s1	EN 1307 Classificatie Classification Classification Klassifizierung Classificazione	Class 33 Commercial Heavy
ISO 140/8 Contactgeluidsisolatie Isolation aux bruits d'impact Impact sound insulation Trittschallverbesserungsmaß Miglioramento acustico	± 28 dB	ISO 354 Geluidsdempingsvermogen α_s Absorption phonique α_s Sound absorption α_s Schallabsorptionsgrad α_s Grado d'assorbimento acustico α_s	± 0,30 1000 Hz	ISO 11654 Geluidsdempingsvermogen α_w Absorption phonique α_w Sound absorption α_w Schallabsorptionsgrad α_w Grado d'assorbimento acustico α_w	± 0,25	DIN 52612 Warmteoorlaatweerstand Résistivité thermique Thermal retention Wärmedurchlaßwiderstand Resistenza termica	± 0,112 m²/kW
TOG rating	± 1,12	ISO 6356 2000 Teil 2: Permanent antistatisch Antistatique permanente Permanently antistatic Permanent antistatisch Antistatico permanente	< 2 kV	ISO 6356 2000 Teil 6: Oppervlakteweerstand RoT Résistance horizontale RoT Surface resistance RoT Oberflächenwiderstand RoT Resistenza in superficie Rot	≤ 10⁹ Ω	ISO 10965 1999 Teil 6: Doorgangweerstand RdT Résistance transversale RdT Vertical resistance RdT Durchgangswiderstand RdT Resistenza ai passaggi RdT	≤ 10⁹ Ω
ISO 105 B02 Lichtechtheid Solidité à la lumière Lightfastness Lichtechtheid Solidità colori alla luce	≥ 5-6	ISO 105 E01 Waterrechtheid verkleuring Solidité à l'eau changement couleur Waterfastness change in colour Wasserechtheit Änderung der Farbe Solidità colori all'acqua cambio colore	≥ 4	ISO 105 E01 Waterrechtheid uitbloeding Solidité à l'eau dégorgement Waterfastness staining Wasserechtheit anbluten Solidità colori all'acqua sfumatura colore	≥ 3-4	ISO 105 X12 Wrijftechtheid droog Solidité au frottement sec Rubbingfastness dry Reibungechtheit trocken Solidità colori allo sfregamento a secco	≥ 4
ISO 105 X12 Wrijftechtheid nat Solidité au frottement humide Rubbingfastness wet Reibungechtheit nass Solidità colori allo sfregamento umido	≥ 4	Ce produit s'inscrit dans la démarche HQE (F.D.E.S. selon la norme NF P01-10 disponible sur demande). F.D.E.S. = fiche de données environnementales et sanitaires.	HQE	<p>(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading/pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet.</p> <p>For other languages see: www.lano.com</p>			

The Green signature
of Lano Carpets

U₃₅P₃E₁C₀ 12/291



BOA_QMS019_c_199460

